

Exam : EMC E20-845

**Title : Business Continuity Expert
Exam for Implementation
Engineers**

Version : Demo

Important Note, Please Read Carefully

Other examsoon products

[All examsoon IT Exam Products](#)

Our products of Offline Testing Engine

Use the offline Testing engine product to practice the questions in an exam environment.

Build a foundation of knowledge which will be useful also after passing the exam.

[examsoon Testing Engine](#)

Guarantee

Examsoon provides the most competitive quality of all exams for the customers, we guarantee your success at the first attempt with only our Certification Question&Answers, if you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!.

Features

1. Comprehensive questions with complete details
2. Instant Downloadable in PDF form.
3. Verified Answers Researched by Industry Experts
4. Questions accompanied by exhibits
5. Drag and Drop questions as experienced in the Actual Exams.
6. These questions and answers are backed by our GUARANTEE.
7. Questions updated on regular basis.
8. Like actual certification exams our product is in multiple-choice questions (MCQs).

1. A customer wants to split a BCV copy of the production database once a week and then use Clones of the BCV for testing.

Which operations are required to make a Clone usable by a host?

- A. Activate the Clone and split the Clone
- B. Establish the Clone and split the Clone
- C. Split the BCV, create the Clone, and activate the Clone
- D. Establish the BCV, create the Clone, and mount the Clone

Answer: C

2. A customer is using a RAID-1 standard device that already has a paired BCV and one CopyOnAccess Clone copy.

What is the maximum number of additional CopyOnWrite Snap sessions that the customer can create on this device?

- A. 1
- B. 7
- C. 13
- D. 16

Answer: C

3. After doing a BCV split and mount on a Window's backup host, the customer determines the data on the BCV copy is inconsistent and missing files. The customer's script is using the SUI utility symntctl.

Which command should be used to help prevent the inconsistent BCV?

- A. umask
- B. flush
- C. umount
- D. deport

Answer: B

4. A customer has an application that runs on a SQL Server 2000 database, and the information is stored on a DMX. The customer wants to make daily, local backups of the database using TSIM.

What action does the tsimsnap backup command perform to create this local copy?

- A. Establishes standard and BCV volumes
- B. Keeps track of the database backup history
- C. Requests the operator perform a SQL Server snapshot
- D. Flushes the filesystems used by the database and performs the BCV split

Answer: D

5. Click the Exhibit button.

```

sun-55:/ >symrdf -g test query
Device Group <DG> Name      : test
DG's Type                  : RDF1
DG's Symmetrix ID         : 000187940398

Source <R1> View          Target <R2> View          MODES
-----
Standard                  LI                          ST
Logical                    N                          A
Device                     E                          E
Dev                        E                          E
R1 Inv                     R2 Inv                     R1 Inv
Tracks                     Tracks                     Tracks
MDA                        MDA                        MDA
RDF Pair                   RDF Pair
STATE                      STATE

DEU001  01AA RW          0          3604 NR 032A NR          0          0 A.. Suspended
DEU002  01AB RW          0          3604 NR 032B NR          0          0 A.. Suspended
DEU003  01AC RW          0          3604 NR 032C NR          0          0 A.. Suspended
DEU004  01AD RW          0          3604 NR 032D NR          0          0 A.. Suspended
DEU005  01AE RW          0          3604 NR 032E NR          0          0 A.. Suspended
DEU006  01BA RW          0          3604 NR 033A NR          0          0 A.. Suspended
DEU007  01BB RW          0          3604 NR 033B NR          0          0 A.. Suspended
DEU008  01BC RW          0          3604 NR 033C NR          0          0 A.. Suspended
DEU009  01BD RW          0          3604 NR 033D NR          0          0 A.. Suspended
DEU010  01BE RW          0          3604 NR 033E NR          0          0 A.. Suspended
DEU0011 01BF RW          0          3604 NR 033F NR          0          0 A.. Suspended
DEU0012 01C0 RW          0          3604 NR 0340 NR          0          0 A.. Suspended

Total
MB(s)          0.0          1353.6          0.0          0.0

Legend for MODES:
M(mode of Operation): A = Async, S = Sync, E = Semi-sync, C = Adaptive Copy
D(omino)             : X = Enabled, . = Disabled
A(daptive Copy)      : D = Disk Mode, W = WP Mode, . = ACp off
  
```

Based on the symrdf query output, what is needed to make the state of RDF pairs consistent?

- A. Change SRDF to synchronous mode, perform SRDF update, then change SRDF to asynchronous mode
- B. Change SRDF to adaptive copy mode, perform SRDF update, then change SRDF to asynchronous mode
- C. Change SRDF to adaptive copy mode, perform SRDF resume, then change SRDF to asynchronous mode.
- D. Change SRDF to synchronous mode, write disable R2, perform SRDF failover, perform SRDF resume, then change SRDF to asynchronous mode

Answer: C

6. A customer needs to implement a multi-hop SRDF/AR configuration.

How does the bandwidth between Symmetrix arrays impact the potential amount of data lost in case of failure?

- A. Less bandwidth means more cache required
- B. Less bandwidth means longer SRDF/AR cycles
- C. More bandwidth means longer SRDF/AR cycles
- D. More bandwidth means potential data inconsistency in case of failure

Answer: B

7. A customer is implementing SRDF/A over GigE but is having problems getting through the corporate firewall.

What are the first steps for troubleshooting?

- A. Verify cache on both DMXs exactly match, and COVDs are defined on both DMXs
- B. Verify the SRDF link TCP/IP port matches on each DMX, and that port is open on the firewall(s)
- C. Verify the Fibre adapters are configured as SNOW resources, and COVDs are properly defined in the bin files
- D. Turn off data compression on the GigE adapters, verify TCP/IP addresses on both DMXs, and verify SNOW is defined on the SRDF GigE adapters' bin file.

Answer: B

8. A customer has had security issues in the past. To resolve them, firewalls were set up between network segments within and external to his data center environment. You are configuring the communication between the Replication Manager server and the administration console(s).

Which port must be allowed to pass through the firewalls to facilitate administration?

- A. 6753
- B. 8080
- C. 65431
- D. 65432

Answer: D

9. You need to configure the volume layout for Oracle on a Linux server that will reside on the Symmetrix DMX. You also need to minimize performance issues resulting from partition misalignment on the physical disks.

Which tool is used to align the disk partition?

- A. fdisk
- B. format
- C. Diskpar
- D. Diskpart

Answer: A

10. You are planning a new replication of an online transaction processing (OLTP) Oracle database to a remote Symmetrix. The requirements for the task are:

1. The distance between the local and remote sites is 1600 km
2. The local database must remain online
3. The customer requires only a restartable copy of the database on the target site
4. The task should have a minimum performance impact to the local database

Choose the best set of EMC technologies for the implementation.

- A.R2, RBCV, Instant Split Technology, and SRDF/DM
- B.R1/BCV, R2, Instant Split Technology, and SRDF/S
- C.R2, RBCV, Consistent Split Technology, and SRDF/S
- D.SRDF/A or SRDF/AR single hop

Answer: D

11. You are reconfiguring a DMX with Solutions Enabler SYMCLI. There are several volumes that are already mapped but not in use. The customer wants to convert them to metavolumes.

What do you do to perform this task?

- A.Unmap the devices, set the volumes to not ready, create the metavolumes, and map them
- B.Create a device group, unmap the devices, create the metavolumes, and map the metavolumes
- C.Set the volumes to not ready, unmap the devices, create the metavolumes, and mount the volumes
- D.Create a device group, set volumes to not ready, unmap the devices, create metavolumes, and map the metavolumes

Answer: D

12. You are implementing SRDF at a customer site, and the customer asks you to configure three additional R1 devices on the source Symmetrix and corresponding R2 devices on the target Symmetrix. You have a host attached to the Symmetrix with SYMCLI already installed, and you have created a device file.

Which operation(s) will create the SRDF device pairs and establish them?

- A.symrdf createpair command with -establish
- B.symrdf createpair command followed by symmir establish command
- C.symmir createpair command followed by symmir establish command
- D.symcfg createpair command followed by symdev establish command

Answer: A

13. Your DMX configuration is approaching 16,000 volumes. In defining the Volume Access Control Database (VCMDB), your 96-cylinder volume is configured as a type-5 VCM database. Once implemented, an old host cannot access the new VCM for device masking commands through SYMCLI. You have verified that the zoning information is correct and can see the VCM using syminq.

What is the next step for troubleshooting?

- A.Verify that the old host is at the latest recommended version of Solutions Enabler using symcli
- B.Initialize the VCMDB using:
symmaskdb sid nnn init file MyInItBackup vcmdb_type 5
- C.Initialize the VCMDB to a type-4 using:
symmaskdb sid nnn init file MyInItBackup vcmdb_type 4
- D.Backup and restore the VCMDB using:

Answer: A

14. A customer wants to implement an Exchange 2003 "hot backup" solution on a DMX with TimeFinder Exchange Integration Module (TEIM) software. The Exchange Servers are running on Windows 2003. When using TEIM which volume layout is required?

- A. Configure the data files and logs on the same volume
- B. Separate storage groups must always reside on separate volumes
- C. Data stores must be stored on the same Symmetrix logical volume
- D. The checkpoint file for a storage group and the databases that make up that storage group must be located on different volumes

Answer: B


15. A customer is having performance issues with an Oracle database. Workload Analyzer data was collected and reviewed. The EMC IE found a number of busy volumes.

What course of action could the IE use to further identify these busy volumes?

- A. Run Symperf
- B. Ask for an IOSTAT output report
- C. Generate a Symmetrix workload analysis report
- D. Generate reports using the syminq and symdev commands

Answer: D

16. Click the Exhibit button.

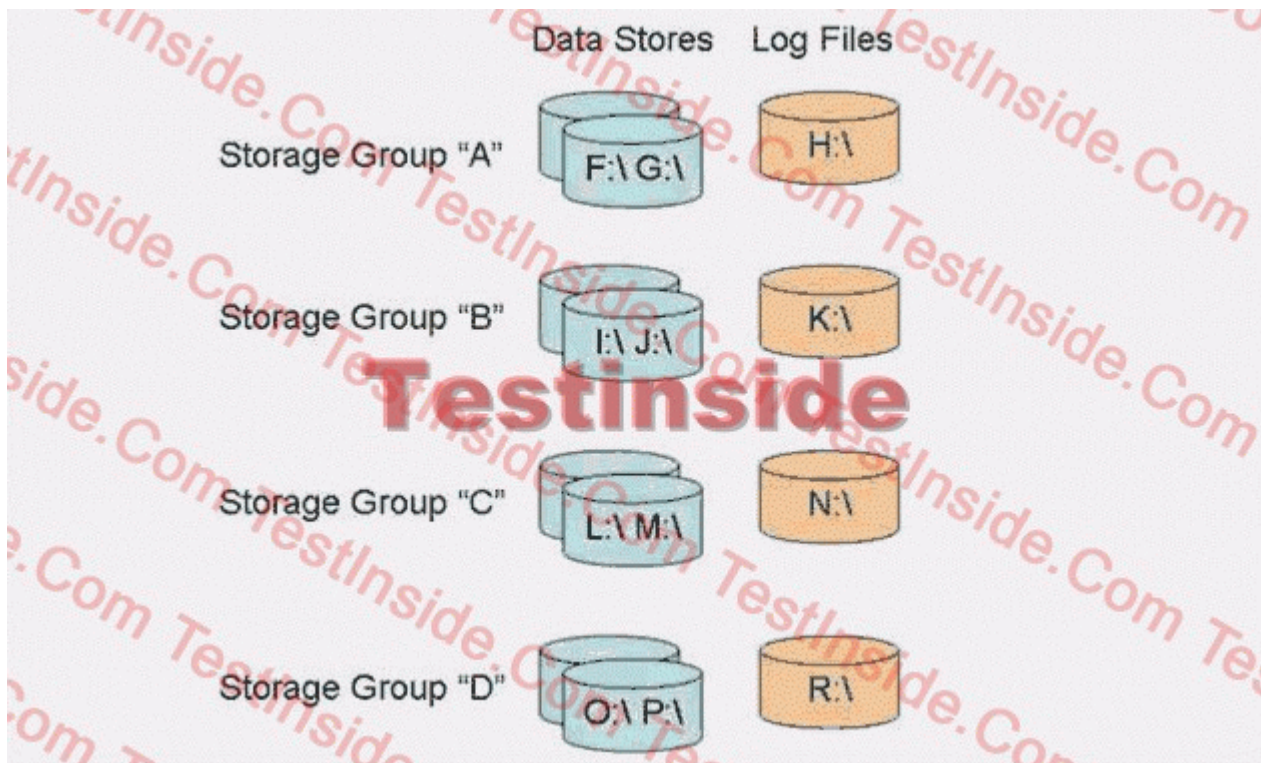

A customer receives an error when trying to back up Exchange using TEIM. The error is, "EMC:ResourcePak_TEIM SymDbVssControl iExchDbVssControl::IEMCVSSRequestor_BackupServer

failed." The databases on the Exchange Server are laid out as shown.

Which is most likely the cause of the error?

- A.Exchange production volumes are corrupt
- B.There is insufficient time to split all the volumes
- C.Services for Exchange on the backup host are started
- D.Services for Exchange on the production host are down

Answer: B

17. A customer has implemented SRDF over Fibre Channel at a distance of 10 km. The two Symms are direct-connected. The customer is experiencing poor link throughput with this solution.

What will fix the problem?

- A.Install 2GB HBAs
- B.Perform switch tuning
- C.Modify the Symmetrix bin
- D.Install a Fibre Channel switch

Answer: D

18. A customer is implementing an SRDF/S solution using switched Fibre Channel. The throughput is lower than expected on the SRDF link.

What is the most likely cause of the problem?

- A.Incorrect SRDF listener port settings
- B.Incorrect BB_Credit setting on the switches
- C.More than 8 RA groups assigned to the RAFs
- D.Not enough cache allocated to the SRDF devices

Answer: B

19. A customer wants to implement a remote site replication via SRDF.

Which tool is used to calculate the number of tracks to be replicated?

- A.EMC DRU
- B.EMC TimeFinder
- C.EMC Change Tracker
- D.EMC Symmetrix Optimizer

Answer: C

20. You are validating a remote replica configuration where a RAID-1 protected R1 device needs to be replicated remotely to a RAID-1 protected R2 device. The source R1 device already is a part of a TimeFinder concurrent BCV configuration.

What should you consider to validate the configuration?

- A.The number of I/Os between R1 and BCVs

- B. Whether the R2 device is being remotely replicated to a RBCV
- C. The number of mirror positions available to the RDF target device
- D. The number of mirror positions available to the RDF source device

Answer: D

Examsoon.com was founded in 2006. The safer,easier way to help you pass any IT Certification exams . We provide high quality IT Certification exams practice questions and answers(Q&A). Especially [Adobe](#), [Apple](#), [Citrix](#), [Comptia](#), [EMC](#), [HP](#), [Juniper](#), [LPI](#), [Nortel](#), [Oracle](#), [SUN](#), [Vmware](#) and so on. And help you pass any IT Certification exams at the first try.

we guarantee your success at the first attempt with only our Certification Question&Answers, if you do not pass the exam at the first time, we will not only arrange FULL REFUND for you, but also provide you another exam of your claim, ABSOLUTELY FREE!

You can reach us at any of the email addresses listed below.

E-MAIL: [examsoon\(at\)hotmail.Com](mailto:examsoon(at)hotmail.Com)